Viewpoint Parameters

OS reference: E313 068, N203 596

Ground Level Elevation: 549m AOD

Camera Height: 1.5m AGL

Direction of view to site centre³: 123°

Distance to nearest turbine: 12,115 m

Number of blade tips theoretically visible⁴:

Number of hubs theoretically visible4:

Date and time of viewpoint photography: 05/03/2021 @ 16:50

Canon EOS 5D Mk2

50mm (Canon EF 50mm f/1.8)

Information on the limitations of visualisations:

Visualisations of wind farms have a number of limitations which you should be aware of when using them to form a judgement on a wind farm proposal. These include:

- A visualisation can never show exactly what the wind farm will look like in reality due to factors such as: different lighting, weather and seasonal conditions which vary through time and the resolution of the image;
- The images provided give a reasonable impression of the scale of the turbines and the distance to the turbines, but can never be 100% accurate;
- A static image cannot convey turbine movement, or flicker or reflection from the sun on the turbine blades as they move;
- The viewpoints illustrated are representative of views in the area, but cannot represent visibility at all locations;
- To form the best impression of the impacts of the wind farm proposal these images are best viewed at the viewpoint location shown;
- The images must be printed at the right size to be viewed properly (260mm by 820mm);
- You should hold the images flat at a comfortable arm's length. If viewing these images on a wall or board at an exhibition, you should stand at arm's length from the image
- The ZTV presented here takes no account of the screening effects of vegetation or

Additional notes:

• Hub height: 84.5m • Rotor diameter: 117m

1. This figure has been based on the following parameters:

Turbine layout file: LTRECELYN001.WFL

- Height to blade tip: 143m 2. Turbine positions could be subject to
- micro-siting (typically up to 50m).
- 3. Direction given as bearing relative to Grid North (BNG).
- 4. The number of turbine blades and hubs theoretically visible is counted from the wireframe in sets of 3 and ignores the screening effects of any intervening objects and forestry.

Client

Trecelyn Wind Farm Landscape and Visual Impact Assessment

Figure 6.35a Viewpoint 17: Rhymney Valley Ridgeway Walk on Cefn y Brithdir


102° horizontal field of view


53.5° horizontal field of view


blade tip may be visible 2 blade tips may be visible 3 blade tips may be visible


4 blade tips may be visible


October 2023

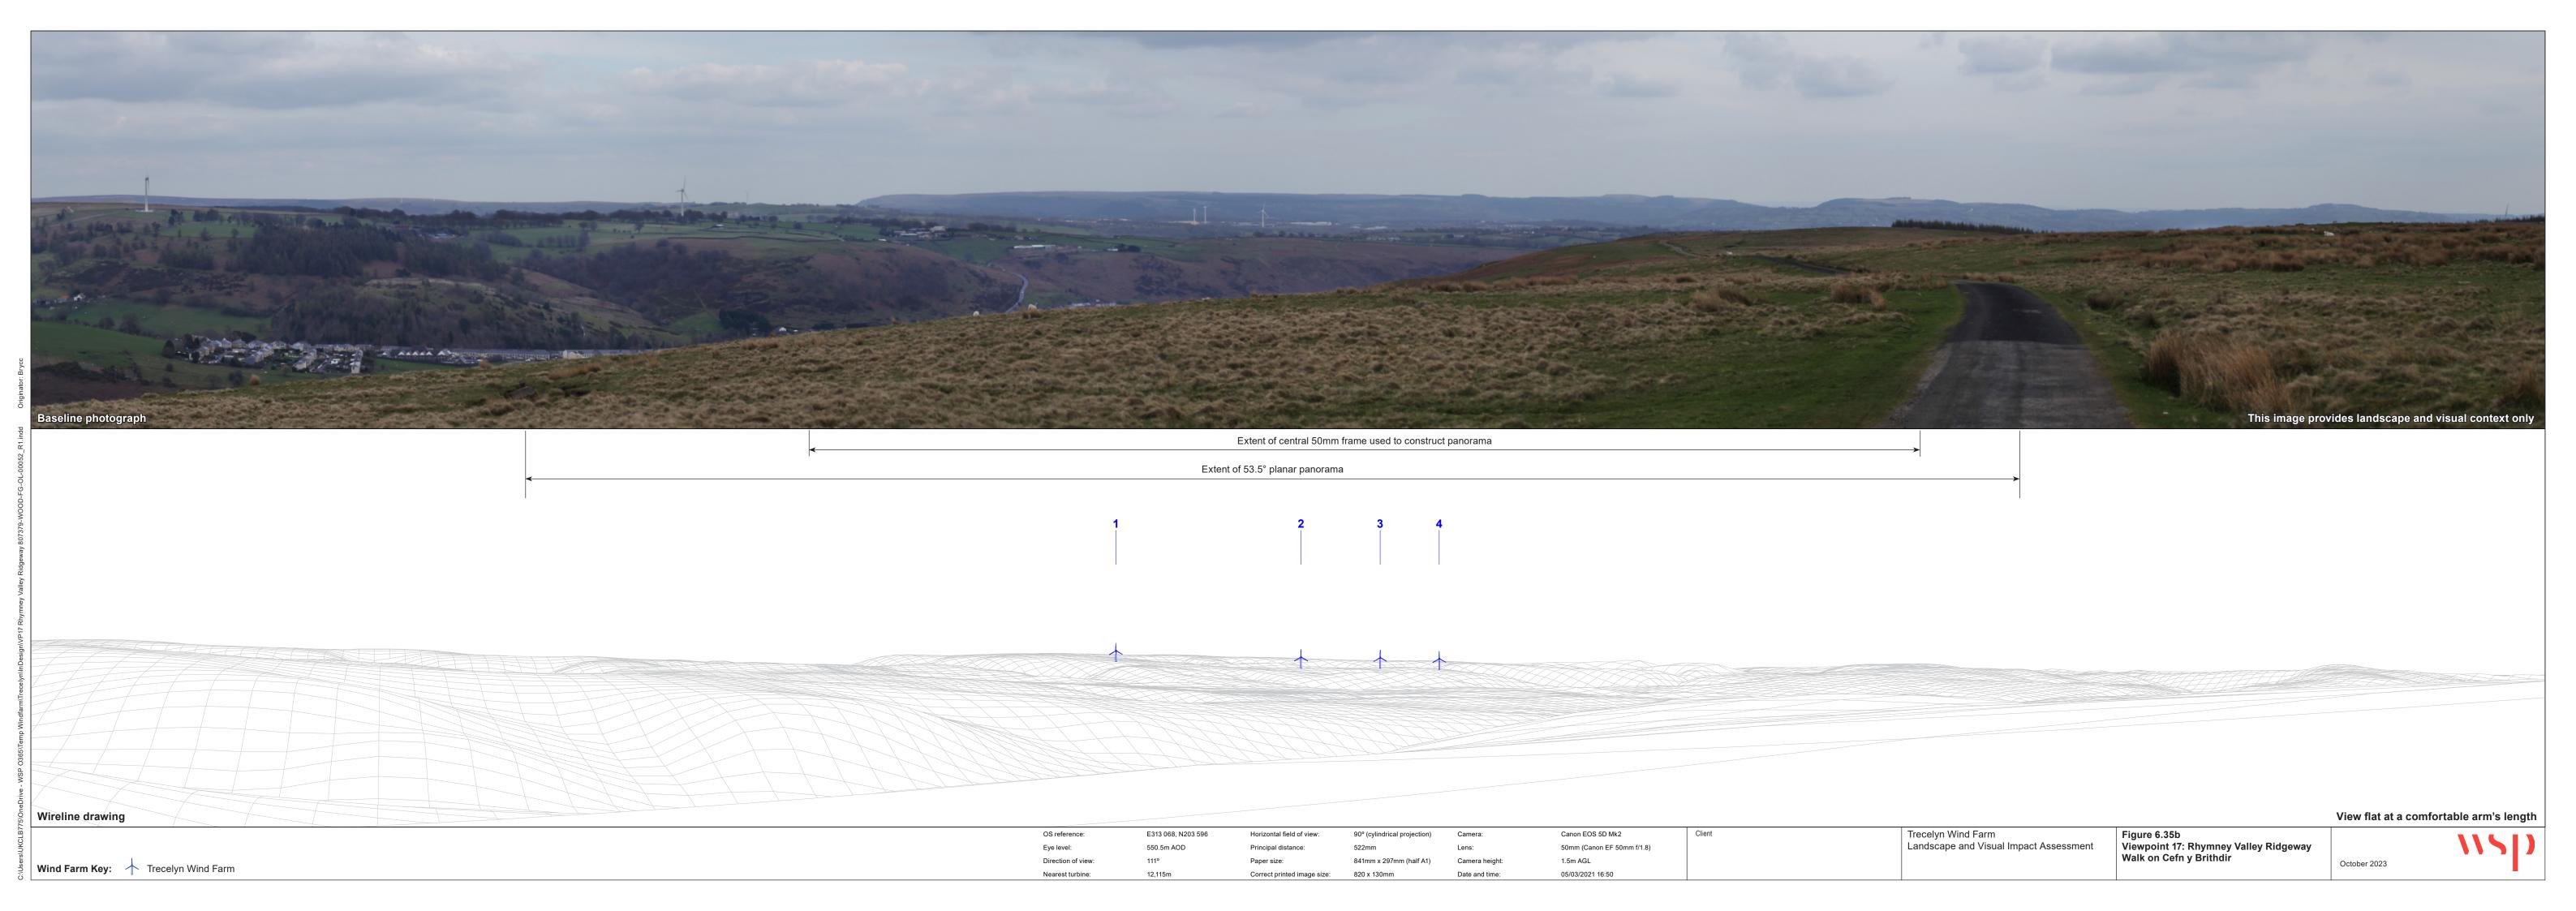


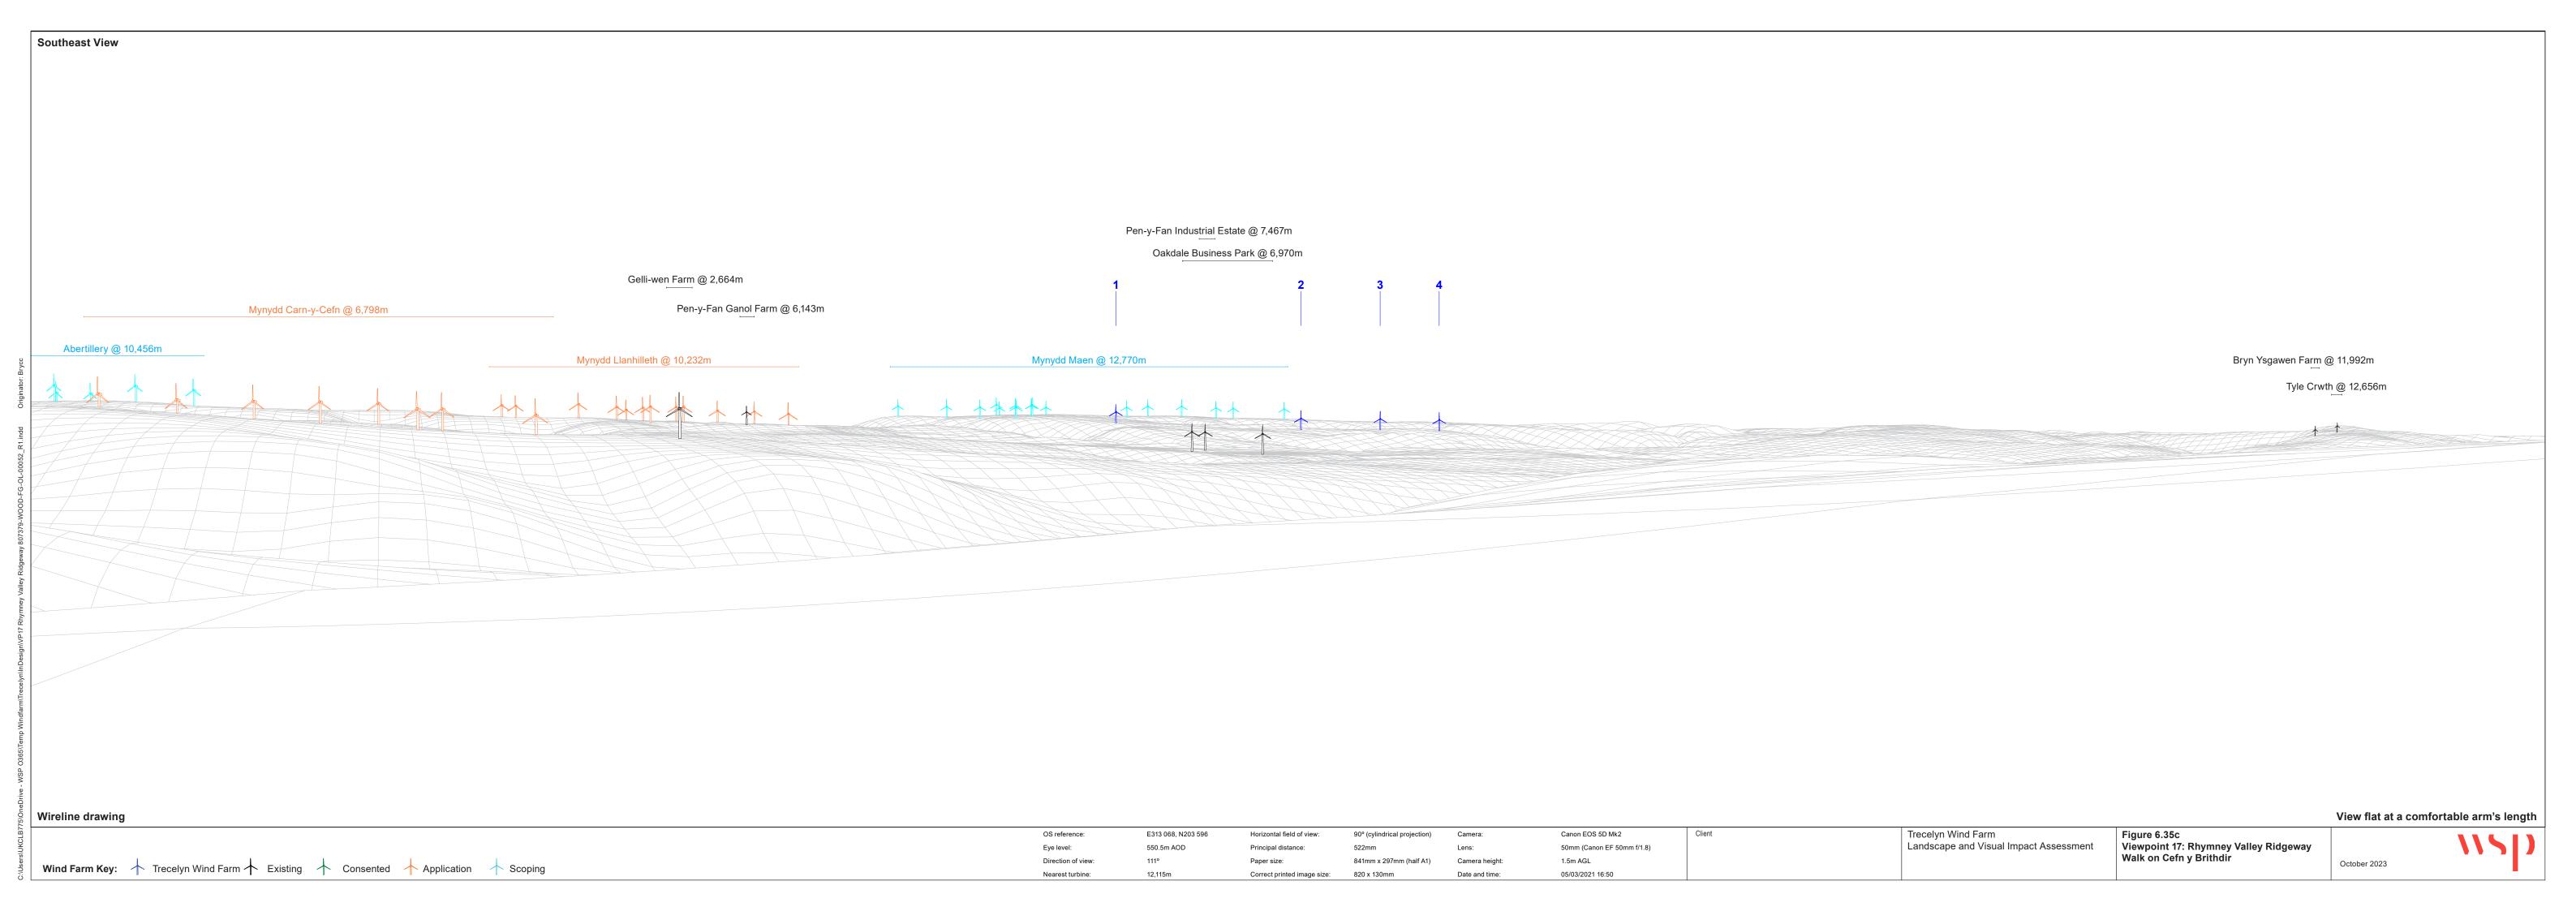

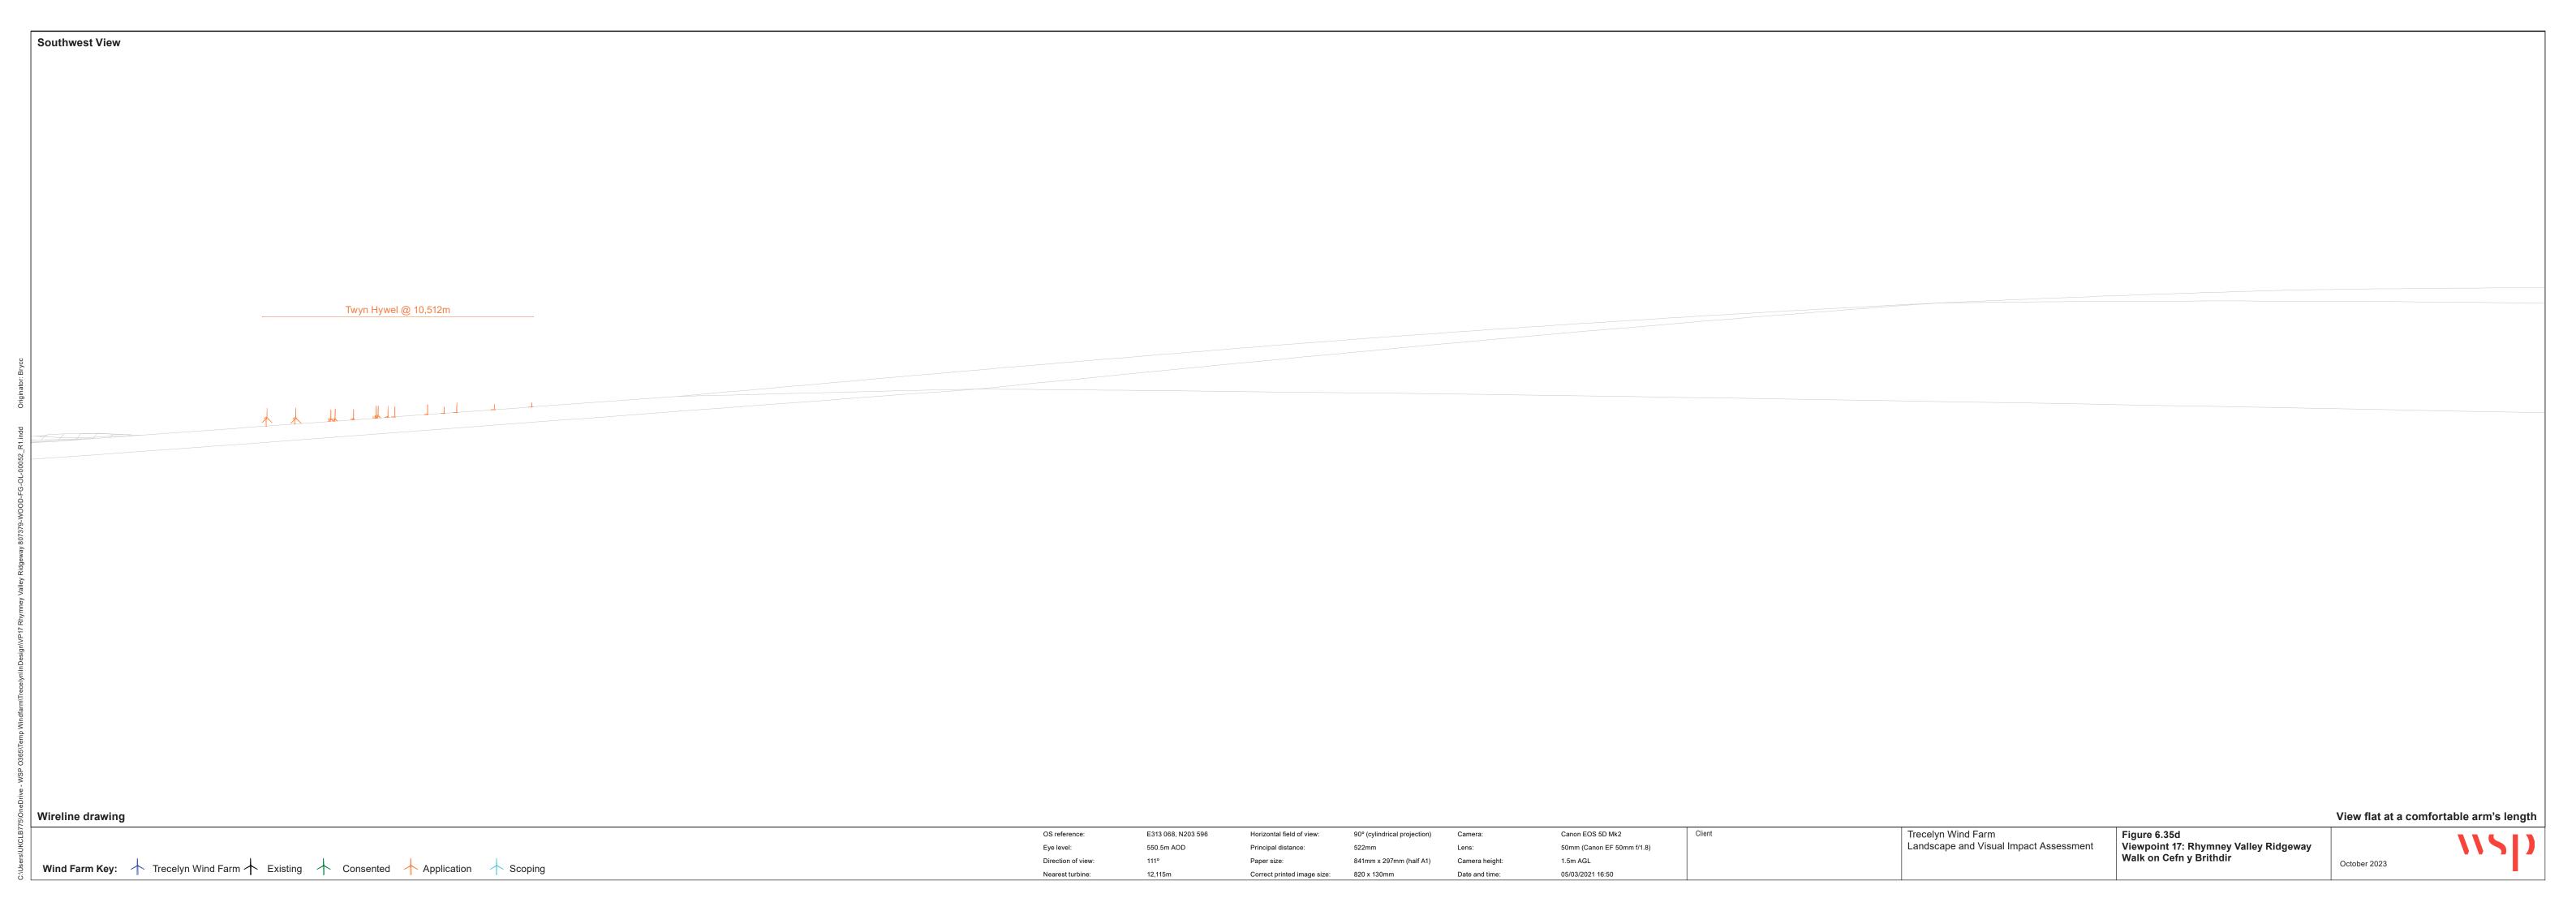

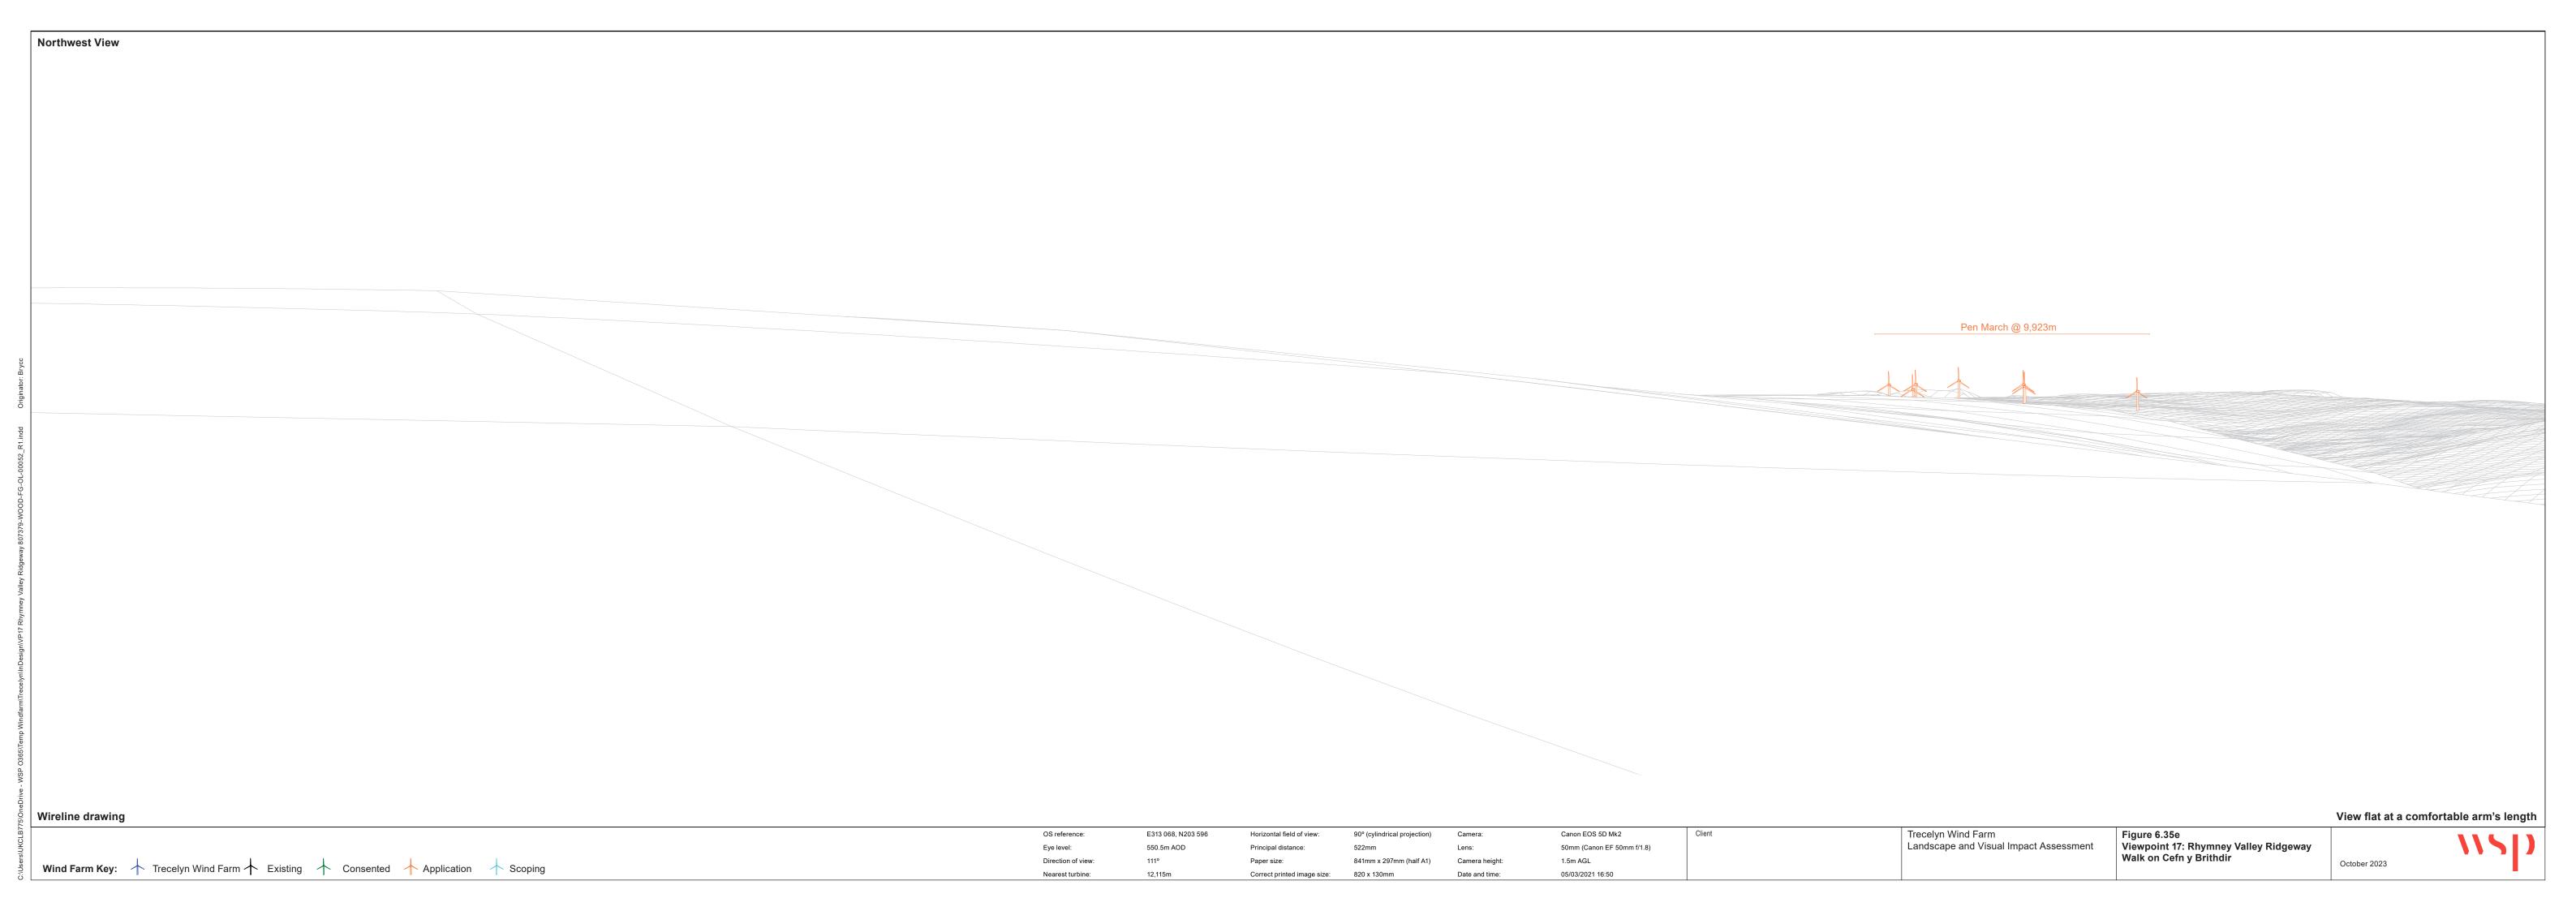

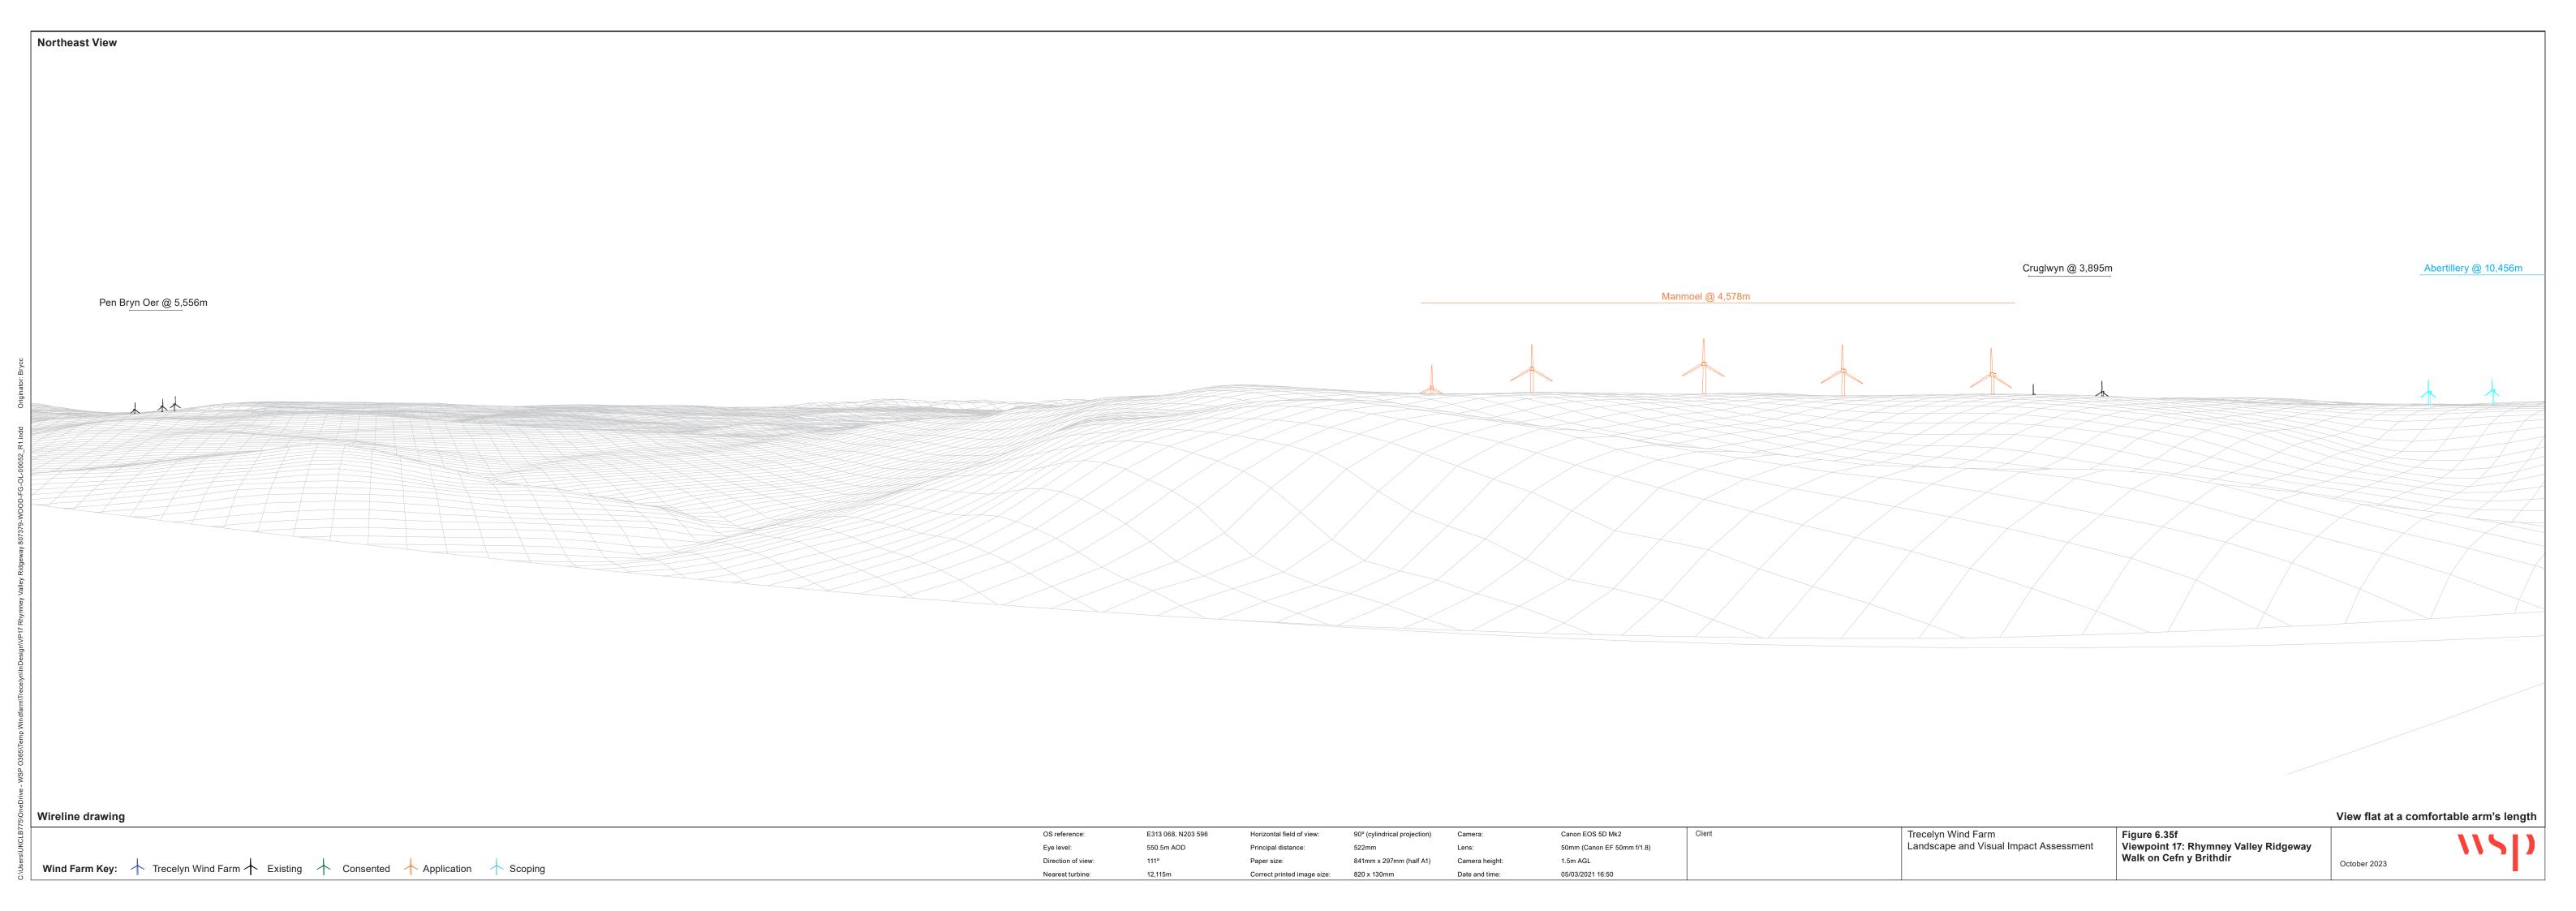

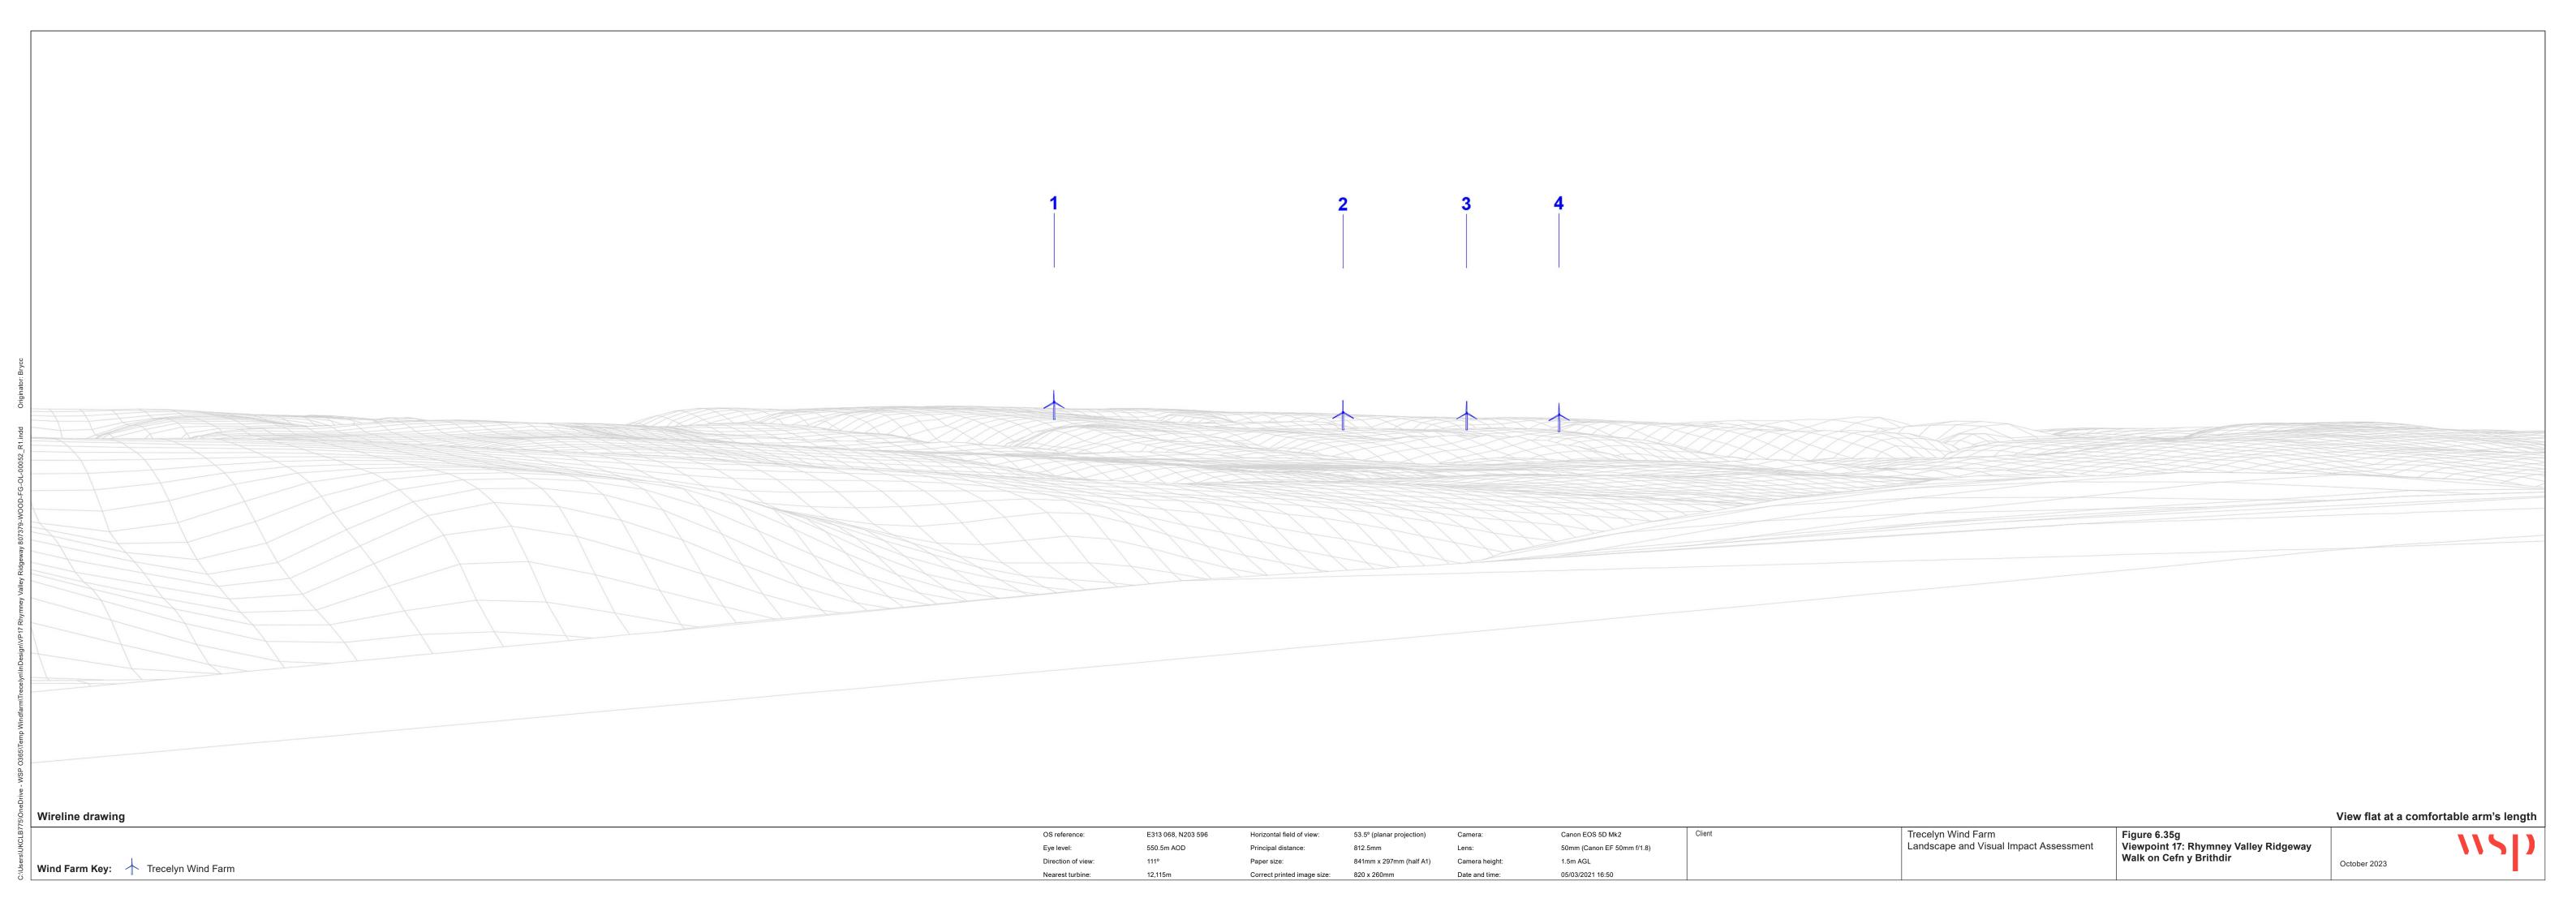





Eye level:

Direction of view:

Photomontage

Horizontal field of view: 90° (cylindrical projection) Camera: Canon EOS 5D Mk2 Client Trecelyn Wind Farm Figure 6.35i

50mm (Canon EF 50mm f/1.8)

1.5m AGL

Trecelyn Wind Farm
Landscape and Visual Impact Assessment

Wiewpoint 17: Rhymney Valley Ridgeway
Walk on Cefn y Brithdir

October 2023